



SSCE5V091N1

2-Lines Uni-directional low Capacitance TVS Diode

● Description

The SSCE5V091N1 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The SSCE5V091N1 has an ultra-low capacitance with a typical value at 0.6pF, and complies with the IEC61000-4-2 (ESD) with $\pm 25\text{kV}$ air and $\pm 20\text{kV}$ contact discharge. It is assembled into an ultra-small 1.0x0.6x0.5mm lead-free DFN package. The small size, ultra-low capacitance and high ESD surge protection make SSCE5V091N1 an ideal choice to protect cell phone, digital visual interfaces and other high speed ports.

● Features

- ✧ Ultra low capacitance
- ✧ Working voltage: 5V
- ✧ Low clamping voltage
- ✧ 3-pin leadless package
- ✧ Low Leakage Current
- ✧ Complies with following standards:
 - IEC61000-4-2(ESD) $\pm 20\text{kV}$ (contact), $\pm 25\text{kV}$ (air)
 - IEC61000-4-4(EFT) 40A(5/50ns)
 - IEC61000-4-5(Lightning) 4A(8/20 μs)


● Mechanical Characteristics

- ✧ Package: DFN1006-3L (1.0×0.6×0.5mm)
- ✧ Lead Finish: NiPdAu
- ✧ Case Material: "Green" Molding Compound.
- ✧ UL Flammability Classification Rating 94V-0
- ✧ Moisture Sensitivity: Level 3 per J-STD-020


● PIN configuration



DFN1006-3L(Bottom View)



Circuit Diagram



Marking(Top View)


● Applications

- ✧ Cellular Handsets and Accessories
- ✧ Display Ports
- ✧ MDDI Ports
- ✧ USB 2.0 and 3.0 Ports
- ✧ HDMI 1.3 and 1.4
- ✧ Digital Visual Interface (DVI)
- ✧ PCI Express and Serial SATA Ports
- ✧ Notebook Computer
- ✧ IEEE 1394



- **Electronic Parameter**

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PPP}	Peak Pulse Power
C	Junction Capacitance

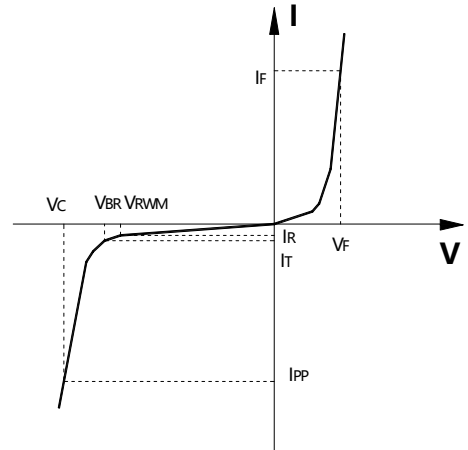

- **Absolute maximum rating @ $T_A=25^{\circ}\text{C}$**


Parameter	Symbol	Value	Units
Peak Pulse Power (8/20 μs)	P_{PPP}	60	W
Peak Pulse Current (8/20 μs)	I_{PP}	4	A
ESD Rating per IEC61000-4-2	Contact Air	± 20	kV
		± 25	
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$

- **Electrical Characteristics @ $T_A=25^{\circ}\text{C}$**


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$			0.5	μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$			10	V
Clamping Voltage	V_C	$I_{PP} = 4\text{A}$, $t_P = 8/20\mu\text{s}$		11	15	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$, between Pin 1 and Pin 2		0.4	0.6	pF
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$, Pin 1 or Pin 2 to Pin 3		0.8	1.0	pF




- Typical Performance Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

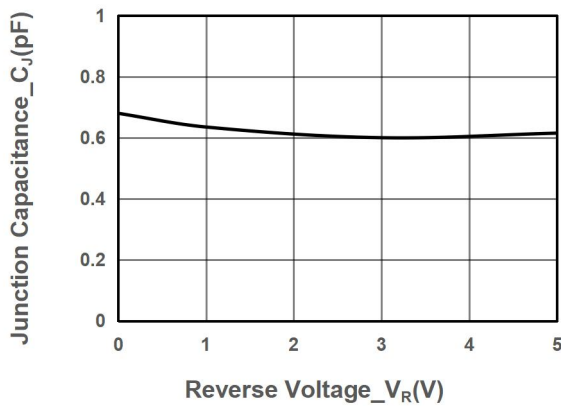


Junction Capacitance vs. Reverse Voltage

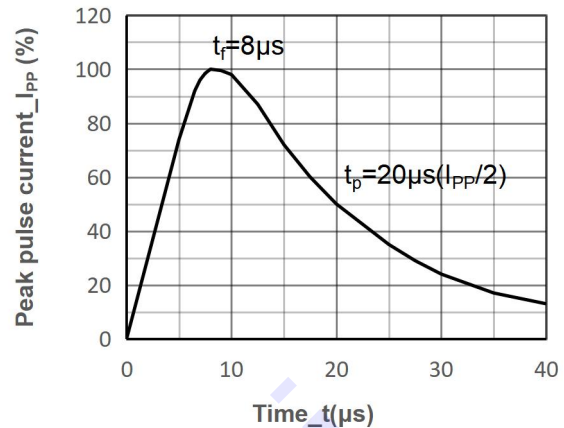


8/20μs Pulse Waveform

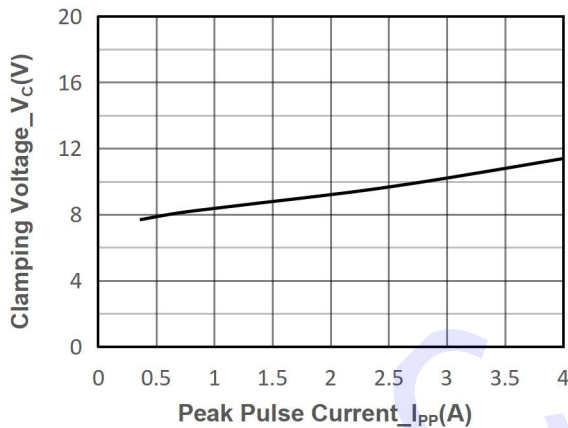


Clamping Voltage vs. Peak Pulse Current

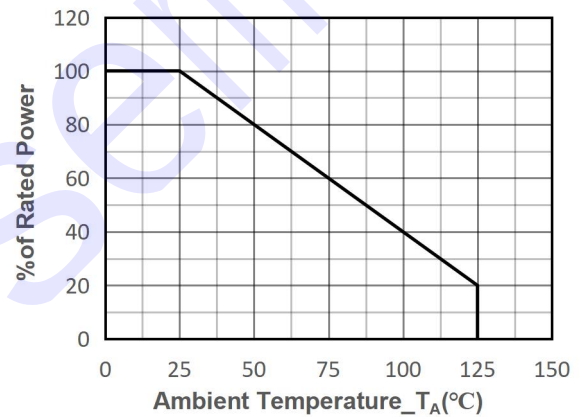

Power derating vs. Ambient temperature

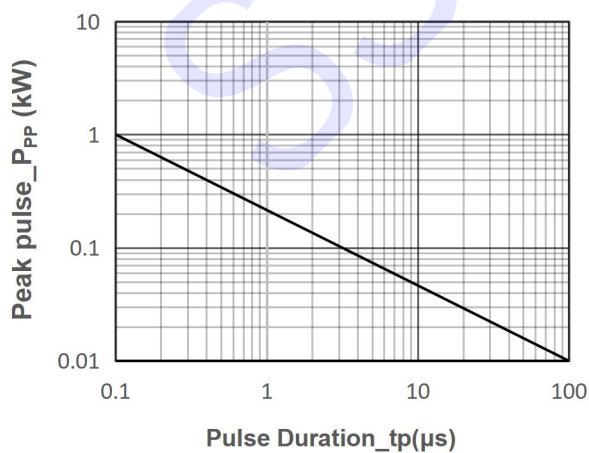

Peak Pulse Power vs. Pulse Time

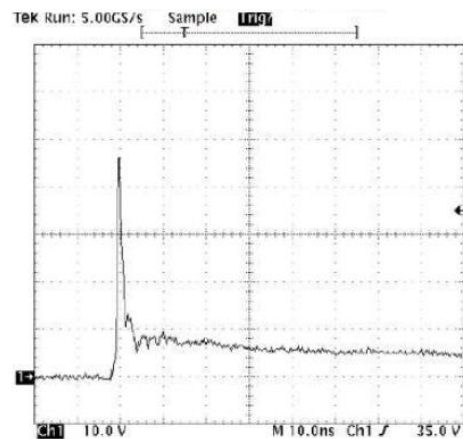

ESD Clamping Voltage

8 kV Contact per IEC61000-4-2



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V091N1	DFN1006-3L	10000	7 Inch


Mechanical Data

Case: DFN1006-3L


Case Material: Molded Plastic. UL Flammability



TOP VIEW




BOTTOM VIEW



SIDE VIEW

DIM	Millimeters	
	Min	Max
A	0.43	0.55
A1	0.00	0.05
B	0.00	0.05
b	0.20	0.30
D	0.95	1.05
E	0.55	0.65
L	0.45	0.55
L1	0.15	0.19
e	0.645BSC	
e1	0.35BSC	
K	0.20	0.30

Suggested Land Pattern

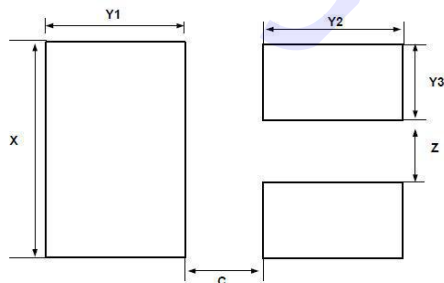

DIM	Millimeters
C	0.25
X	0.65
Y1	0.50
Y2	0.50
Y3	0.25
Z	0.20



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.