



## SSCE3V322L1

1-line Bidirectional Micro Packaged TVS Diodes for ESD Protection

### ● Description


The SSCE3V322L1 is a bi-directional TVS diode. It is designed with AF process TVS technology to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium.

It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD(electrostatic discharge), and EFT (electrical fast transients).


### ● Feature

- ✧ 80W peak pulse power ( $t_P = 8/20\mu s$ )
- ✧ DFN0603-2L Package
- ✧ Working voltage: 3.3V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ RoHS compliant transient protection for high speed data lines to IEC61000-4-2(ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)

### ● PIN configuration

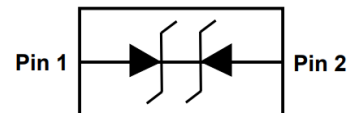

**Top view**



**Marking**

### ● Applications

- ✧ Cellular handsets
- ✧ Computers and peripherals
- ✧ Microprocessors
- ✧ Power lines
- ✧ Portable Electronics
- ✧ Notebooks


### ● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17  $\mu m$
- ✧ Pin flatness:  $\leq 3mil$



## ● Electronic Parameter

| Symbol    | Parameter                           |
|-----------|-------------------------------------|
| $V_{RWM}$ | Peak Reverse Working Voltage        |
| $I_R$     | Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$           |
| $I_T$     | Test Current                        |
| $I_{PP}$  | Maximum Reverse Peak Pulse Current  |
| $V_C$     | Clamping Voltage @ $I_{PP}$         |
| $P_{PP}$  | Peak Pulse Power                    |
| $C_J$     | Junction Capacitance                |

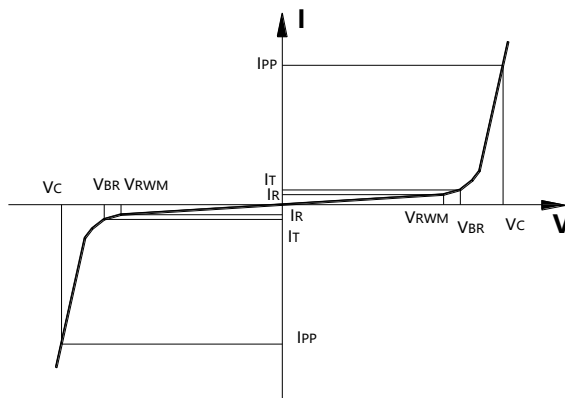

## ● Absolute maximum rating @TA=25°C


| Parameter                                   | Symbol    | Value    | Unit |
|---|-----------|----------|------|
| Peak Pulse Power (8/20μs)                   | $P_{PP}$  | 80       | W    |
| Peak Pulse Current (8/20μs)                 | $I_{PP}$  | 8        | A    |
| ESD Rating per IEC61000-4-2: Contact<br>Air | $V_{ESD}$ | 30<br>30 | KV   |
| Storage Temperature                         | $T_{STG}$ | -55/+150 | °C   |
| Operating Temperature                       | $T_J$     | -55/+125 | °C   |

## ● Electrical Characteristics @TA=25°C


| Parameter                    | Symbol    | Conditions                  | Min. | Typ. | Max. | Unit |
|------------------------------|-----------|-----------------------------|------|------|------|------|
| Peak Reverse Working Voltage | $V_{RWM}$ |                             |      |      | 3.3  | V    |
| Breakdown Voltage            | $V_{BR}$  | $I_T = 1mA$                 | 3.8  |      |      | V    |
| Reverse Leakage Current      | $I_R$     | $V_{RWM} = 3.3V$            |      |      | 0.2  | μA   |
| Clamping Voltage             | $V_C$     | $I_{PP} = 1A, t_P = 8/20μs$ |      | 6    |      | V    |
| Clamping Voltage             | $V_C$     | $I_{PP} = 8A, t_P = 8/20μs$ |      | 8    | 10   | V    |
| Junction Capacitance         | $C_J$     | $V_R = 0V, f = 1MHz$        |      | 13   | 20   | pF   |




## • Typical Performance Characteristics

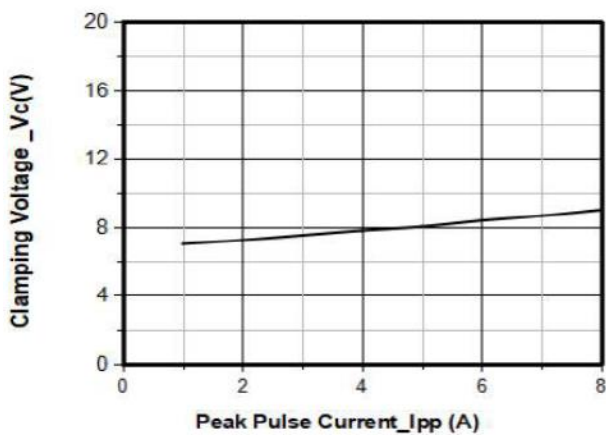


Junction Capacitance vs. Reverse Voltage

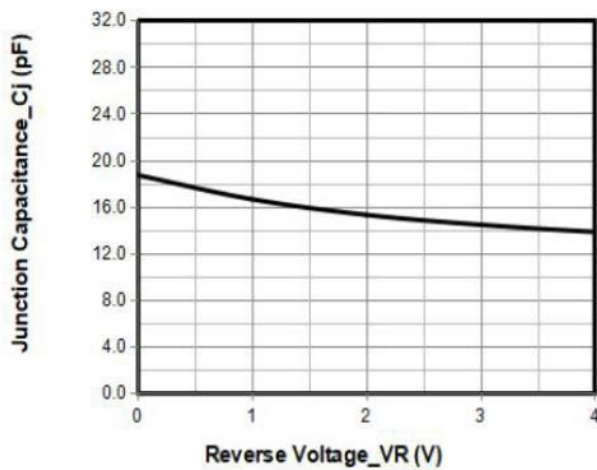


Clamping Voltage vs. Peak Pulse Current

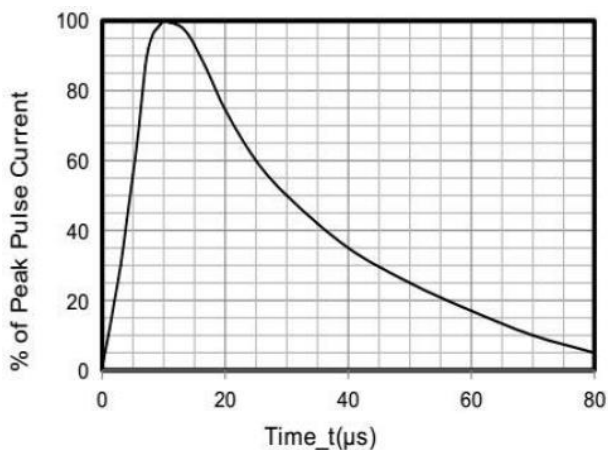


8 X 20 $\mu$ s Pulse Waveform

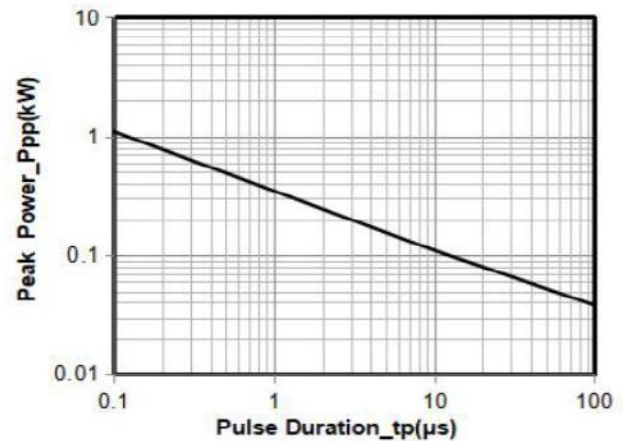

Peak Pulse Power vs. Pulse Time

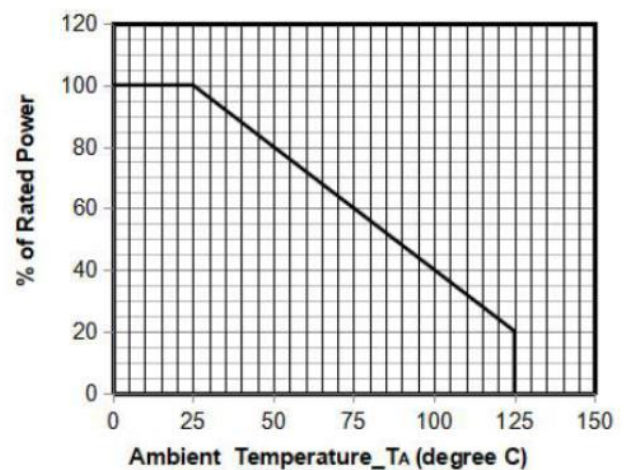

Power Derating Curve

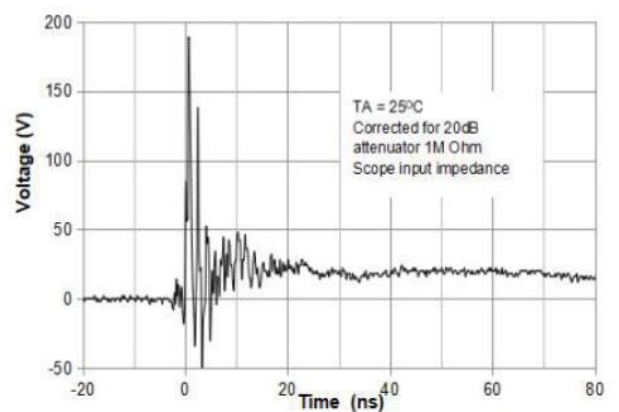

ESD Clamping Voltage

8 kV Contact per IEC61000-4-2



## ● Package Information


### Ordering Information

| Device      | Package    | Qty per Reel | Reel Size |
|-------------|------------|--------------|-----------|
| SSCE3V322L1 | DFN0603-2L | 15000        | 7 Inch    |

### Mechanical Data


Case: DFN0603-2L

Case Material: Molded Plastic. UL Flammability

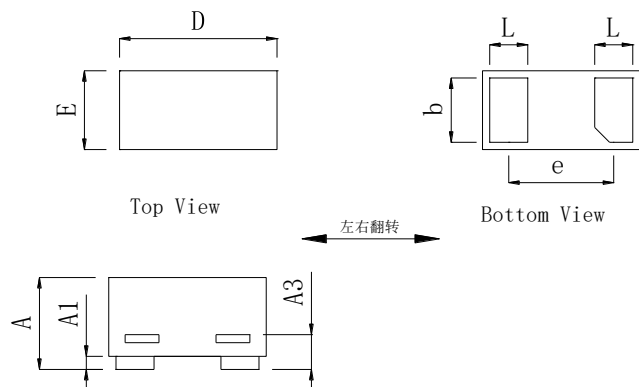


| DIM | Millimeters |       |
|-----|-------------|-------|
|     | Min         | Max   |
| A   | 0.230       | 0.330 |
| A1  | 0.000       | 0.050 |
| A3  | 0.102REF    |       |
| D   | 0.550       | 0.650 |
| E   | 0.250       | 0.350 |
| b   | 0.210       | 0.275 |
| L   | 0.120       | 0.175 |
| e   | 0.40BSC     |       |

### Recommended Pad outline

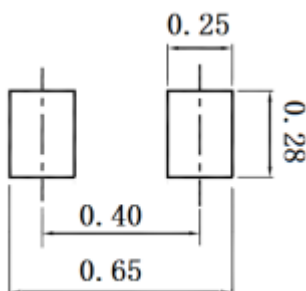

### DFN0603 Reel Dim

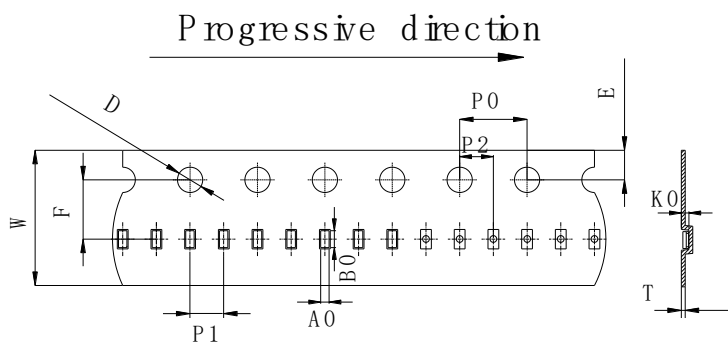

| PACKAGE | W    | E    | F    | P0   | D    | P2   | P1   | T    | A0   | B0   | K0   |
|---------|------|------|------|------|------|------|------|------|------|------|------|
| DFN0603 | 8mm  | 1.75 | 3.5m | 4mm  | 1.5m | 2mm  | 2mm  | 0.23 | 0.34 | 0.67 | 0.4m |
|         | ±0.1 | mm   | m    | ±0.1 | m    | ±0.0 | ±0.1 | mm   | mm   | mm   | m    |
|         |      | ±0.1 | ±0.0 |      | ±0.1 | 5    |      | ±0.0 | ±0.0 | ±0.0 | ±0.0 |
|         |      |      | 5    |      |      |      |      | 2    | 5    | 5    | 5    |



## DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.