



SSCESM712S6

2-Line Ultra Low Capacitance TVS Diode

● Description

The SSCESM712S6 is designed for asymmetrical (12V to -7V) protection in multi-point data transmission standard RS-485 applications. The SSCESM712S6 may be used to protect devices from transient voltages resulting from electrostatic discharge (ESD), electrical fast transients (EFT), and lightning.

The SSCESM712S6 replaces four discrete components by integrating two 12V and two 7V TVS diodes in a single package. The integrated design aids in reducing voltage over-shoot associated with trace inductance. The low clamping voltage of SSCESM712S6 minimizes the stress on the protected transceiver.


● Feature

- ✧ 350W peak pulse power ($t_P = 8/20\mu s$)
- ✧ SOT-23 Package
- ✧ Working voltage: 7V or 12V
- ✧ Low clamping voltage
- ✧ Low leakage current
- ✧ RoHS compliant
- ✧ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 20kV$
 - Contact discharge: $\pm 15kV$


● Applications

- ✧ RS-485 transceivers with extended common mode range
- ✧ Security systems
- ✧ Automatic Teller Machines
- ✧ HFC systems
- ✧ Networks


● PIN configuration



SOT-23



Circuit diagram



Marking(Top view)


● Mechanical data

- ✧ Lead finish: 100% matte Sn(Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17 μm



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

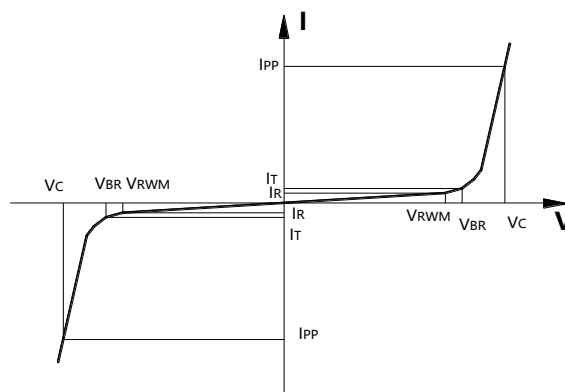

● Absolute maximum rating @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PP}	350	W
Peak Pulse Current (8/20 μs)	I_{PP}	13	A
ESD Rating per IEC61000-4-2:	V_{ESD}	15	kV
Contact		20	
Air			
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$

● Electrical Characteristics @ $T_A=25^{\circ}\text{C}$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Working Voltage	V_{RWM}	Pin1 or Pin2 to Pin3			12	V
		Pin3 to Pin1 or Pin2			7	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$, Pin1 or Pin2 to Pin3	13.3			V
		$I_T = 1\text{mA}$, Pin3 to Pin1 or Pin2	7.5			V
Reverse Leakage Current	I_R	$V_{RWM} = 12\text{V}$, Pin1 or Pin2 to Pin3			0.05	μA
		$V_{RWM} = 7\text{V}$, Pin3 to Pin1 or Pin2			2.0	μA
Clamping Voltage	V_C	$I_{PP} = 5\text{A}$, $t_P = 8/20\mu\text{s}$, Pin1 or Pin2 to Pin3			20	V
		$I_{PP} = 5\text{A}$, $t_P = 8/20\mu\text{s}$, Pin3 to Pin1 or Pin2			12	V
Clamping Voltage	V_C	$I_{PP} = 13\text{A}$, $t_P = 8/20\mu\text{s}$, Pin1 or Pin2 to Pin3			26	V
		$I_{PP} = 13\text{A}$, $t_P = 8/20\mu\text{s}$, Pin3 to Pin1 or Pin2			16	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$			45	pF




Typical Performance Characteristics

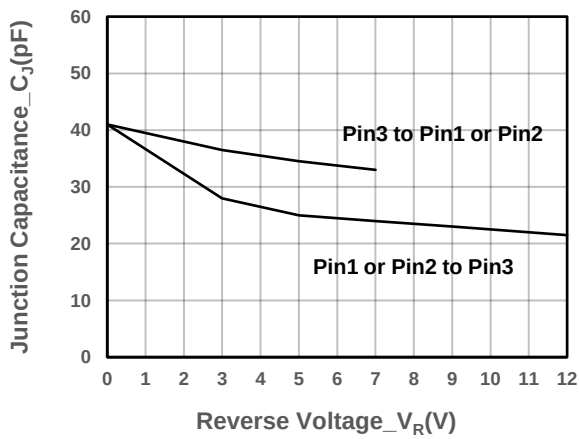


Junction Capacitance vs. Reverse Voltage

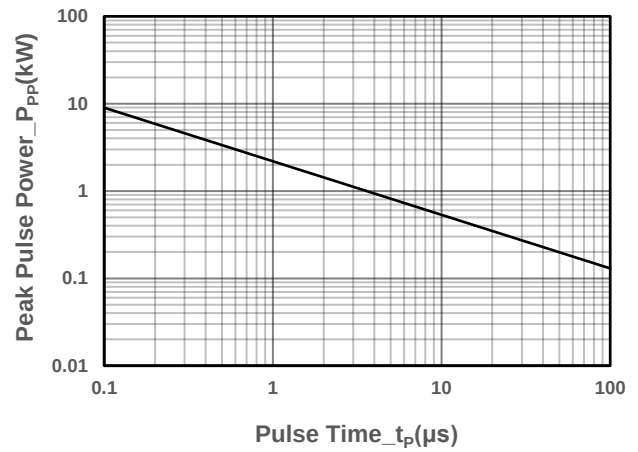


Peak Pulse Power vs. Pulse Time

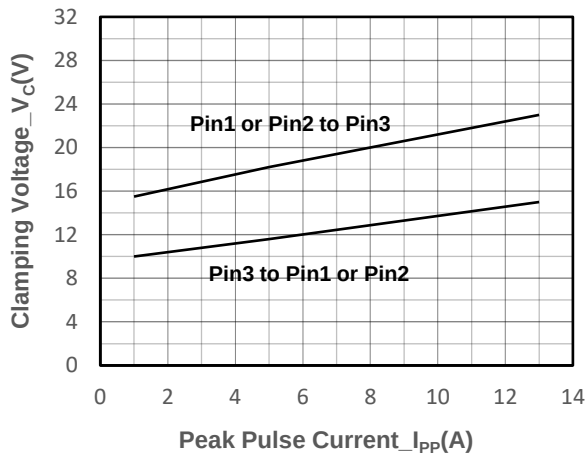

Clamping Voltage vs. Peak Pulse Current

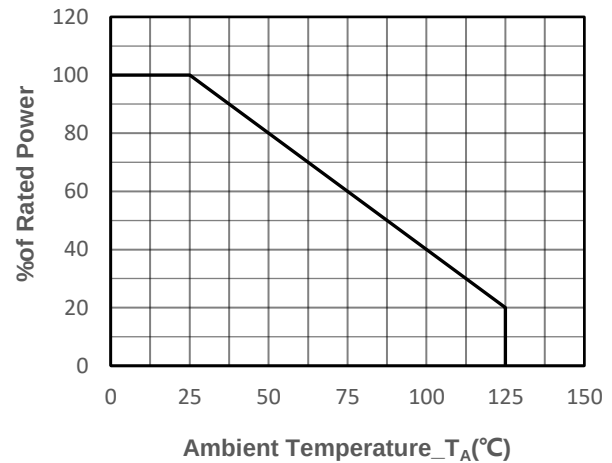

Power derating vs. Ambient temperature

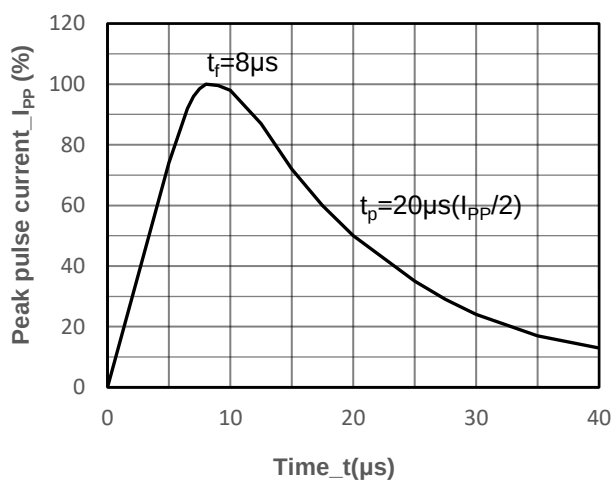

8/20 μ s Pulse Waveform



● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCESM712S6	SOT-23	3000	7 Inch

Mechanical Data


Case: SOT-23

Case Material: Molded Plastic. UL Flammability

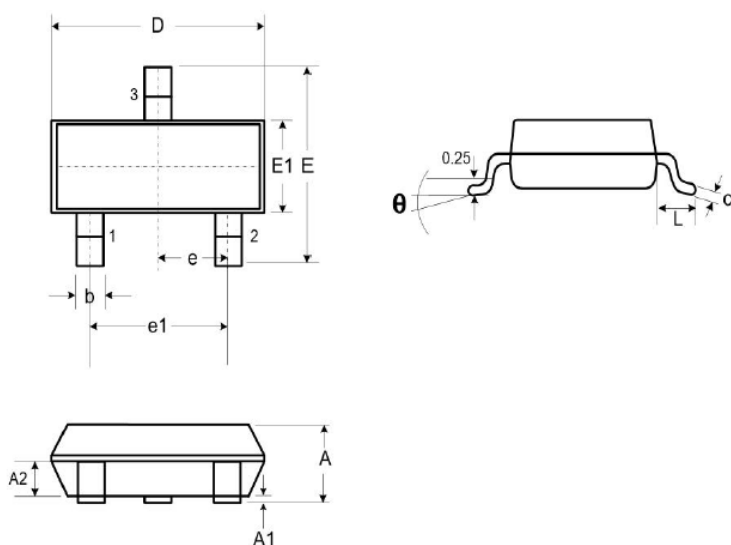

DIM	Millimeters		
	Min.	Typ.	Max.
A	0.89	-	1.12
A1	0.01	-	0.10
A2	0.88	0.95	1.02
b	0.30	-	0.51
c	0.08	-	0.18
D	2.80	2.90	3.04
E	2.10	2.37	2.64
E1	1.20	1.30	1.40
e	0.95		
e1	1.90		
L	0.40	0.50	0.60
L1	0.55		
N	3		
θ	0°	-	8°

Recommended Pad outline (Unit: mm)

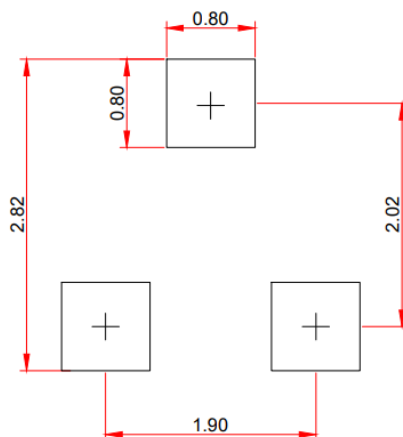



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.