



## SSCT30V11L3


1-Line Uni-directional TVS Diode

### ● Description


The SSCT30V11L3 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The SSCT30V11L3 complies with the IEC 61000-4-2 (ESD) with  $\pm 30\text{kV}$  air and  $\pm 30\text{kV}$  contact discharge. It is assembled into an ultra-small 1.6x1.0x0.5mm lead-free DFN package.

The small size and high ESD surge protection make SSCT30V11L3 an ideal choice to protect cell phone, digital cameras, audio players and many other portable applications.

### ● PIN configuration

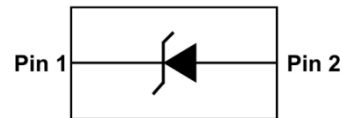

**Top view**



**Marking**

### ● Features

- ✧ 3500W peak pulse power ( $t_P = 8/20\mu\text{s}$ )
- ✧ DFN1610-2L Package
- ✧ Working voltage: 30V
- ✧ Low clamping voltage
- ✧ Low leakage current
- ✧ Small Body Outline Dimensions
- ✧ Response Time is Typically  $< 1\text{ns}$
- ✧ RoHS compliant
- ✧ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 30\text{kV}$
    - Contact discharge:  $\pm 30\text{kV}$
  - IEC 61000-4-5 (Surge) 100A (8/20 $\mu\text{s}$ )

### ● Applications

- ✧ Cellular Handsets and Accessories
- ✧ Personal Digital Assistants
- ✧ Notebooks and Handhelds
- ✧ Portable Instrumentation
- ✧ Digital Cameras
- ✧ Peripherals
- ✧ Audio Players
- ✧ Industrial Equipment


### ● Mechanical Characteristics

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature:  $260^\circ\text{C}$
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: 7 ~ 17  $\mu\text{m}$
- ✧ Pin flatness:  $\leq 3\text{mil}$



- **Electronic Parameter**

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$P_{PP}$	Peak Pulse Power
$C_J$	Junction Capacitance

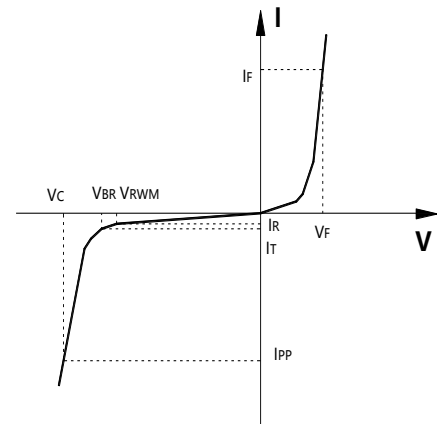

- **Absolute maximum rating @TA=25°C**


Parameter	Symbol	Value	Units
Peak Pulse Power (8/20μs)	$P_{PP}$	3500	W
Peak Pulse Current (8/20μs)	$I_{PP}$	100	A
ESD Rating per IEC61000-4-2: Contact Air	$V_{ESD}$	±30 ±30	KV
Storage Temperature	$T_{STG}$	-55/+150	°C
Operating Temperature	$T_J$	-55/+125	°C

- **Electrical Characteristics @TA=25°C**


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	$V_{RWM}$				30	V
Breakdown Voltage	$V_{BR}$	$I_T = 1mA$	31	32.5		V
Reverse Leakage Current	$I_R$	$V_{RWM} = 30V$			0.5	μA
Clamping Voltage	$V_C$	$I_{PP} = 1A, t_P = 8/20μs$		34		V
Clamping Voltage	$V_C$	$I_{PP} = 100A, t_P = 8/20μs$		36	40	V
Junction Capacitance	$C_J$	$V_R = 0V, f = 1MHz,$		160	180	pF




● Typical Performance Characteristics( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)

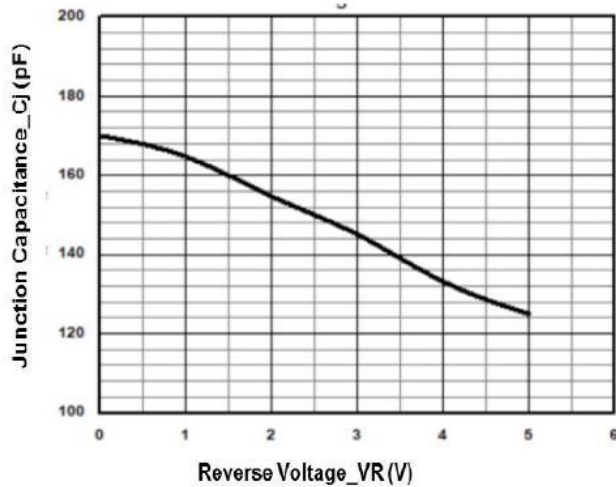


Junction Capacitance vs. Reverse Voltage

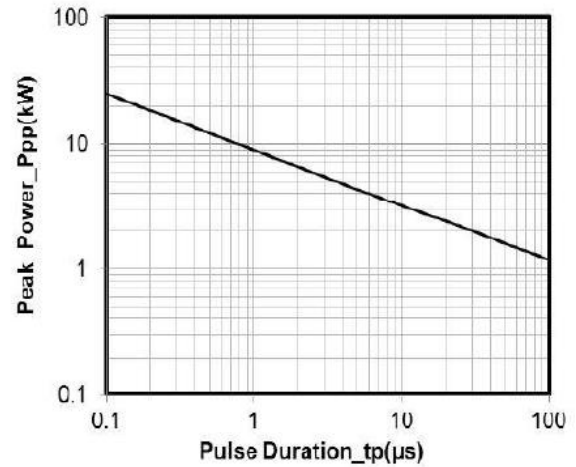


Peak Pulse Power vs. Pulse Time

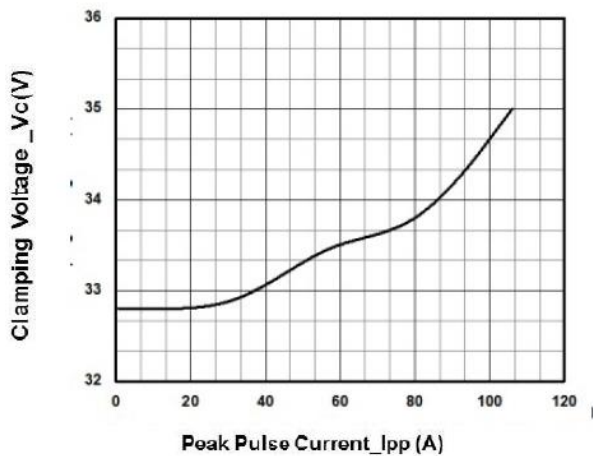


Clamping Voltage vs. Peak Pulse Current

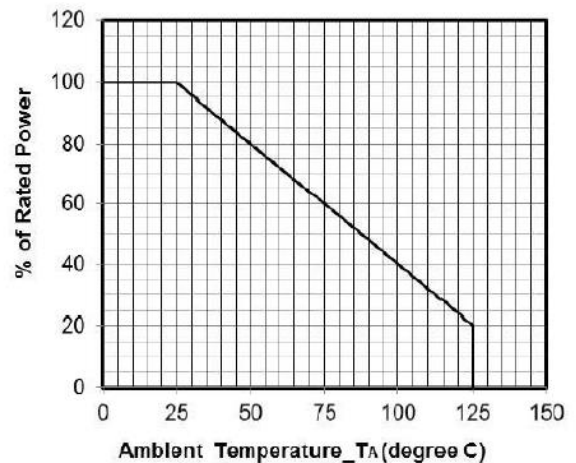

Power Derating Curve

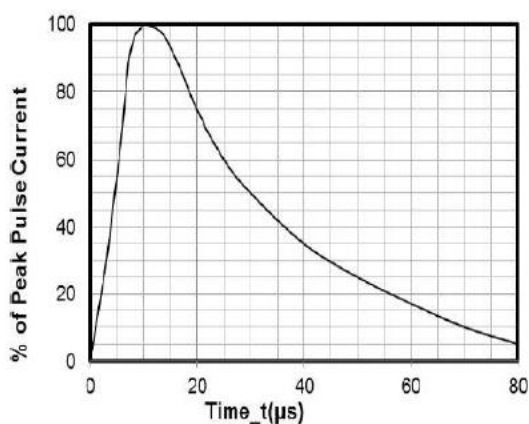

8 X 20μs Pulse Waveform

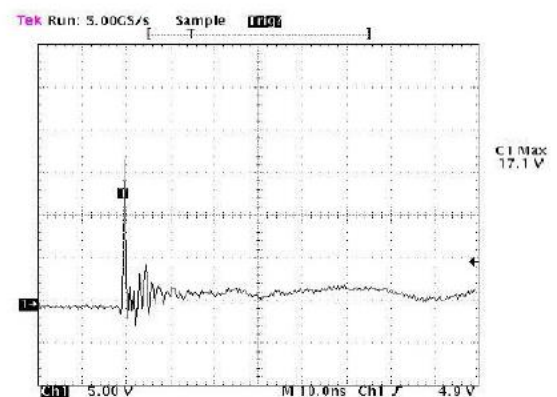

Note: Data is taken with a 10x attenuator

ESD Clamping Voltage

+8 kV Contact per IEC61000-4-2



## ● Package Information


### Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCT30V11L3	DFN1610-2L	3000	7 Inch

### Mechanical Data


Case: DFN1610-2L

Case Material: Molded Plastic. UL Flammability

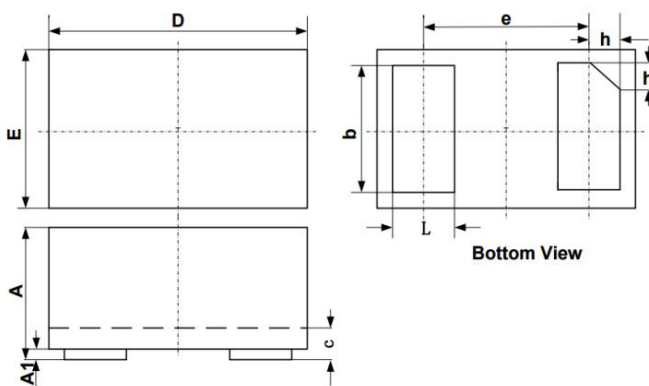

DIM	Millimeters		
	Min.	typ.	Max.
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.75	0.80	0.85
c	0.10	0.15	0.20
D	1.55	1.60	1.65
e	1.10 BSC		
E	0.95	1.00	1.05
L	0.35	0.40	0.45
h	0.15	0.20	0.25

### Recommended Pad outline (Unit: mm)

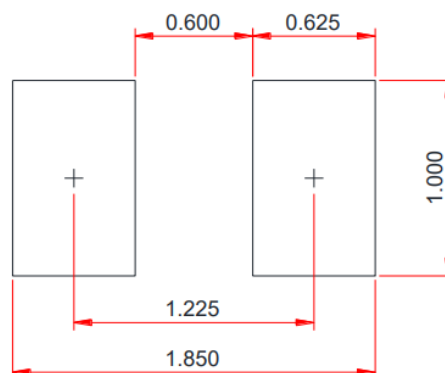



## DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.