



SSCTXXX21D2 Series

1-line TVS Diodes for ESD Protection

● Description


The SSCTXXX21D2 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The SSCTXXX21D2 complies with the IEC 61000-4-2 (ESD) standard with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into a leadfree SOD-323 package.

The small size, low capacitance and high ESD surge protection make SSCTXXX21D2 an ideal choice to protect cell phone, wireless systems, and communication equipment.

● PIN configuration



SOD-323



Circuit Diagram

● Feature

- ✧ 350W peak pulse power ($t_P = 8/20\mu\text{s}$)
- ✧ SOD-323 Package
- ✧ Working voltage: 3.3V, 5V, 12V, 15V, 24V, 36V
- ✧ Low clamping voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ Response Time is $< 1\text{ ns}$
- ✧ RoHS compliant
- ✧ Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC 61000-4-4 (EFT) 40A(5/50ns)

● Applications

- ✧ Cell Phone Handsets and Accessories
- ✧ Microprocessor based equipment
- ✧ Personal Digital Assistants (PDAs)
- ✧ Notebooks, Desktops, and Servers
- ✧ Portable Instrumentation
- ✧ Digital Cameras
- ✧ Laptop Computers
- ✧ Peripherals


● Mechanical data

- ✧ Lead finish: 100% matte Sn (Tin)
- ✧ Mounting position: Any
- ✧ Qualified max reflow temperature: 260°C
- ✧ Device meets MSL 3 requirements
- ✧ Pure tin plating: $7 \sim 17\text{ }\mu\text{m}$
- ✧ Pin flatness: $\leq 3\text{mil}$



- Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

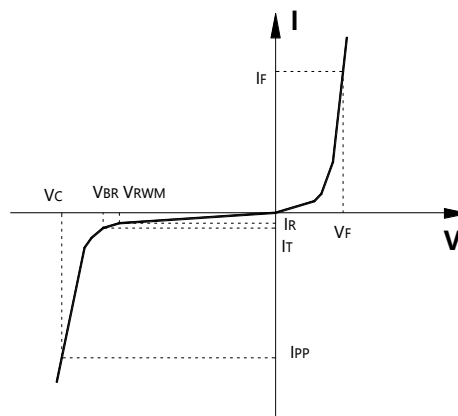

- Absolute maximum rating @ $T_A=25^{\circ}\text{C}$

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PP}	350	W
Peak Pulse Current (8/20 μs)	I_{PP}	SSCT3V321D2: 20 SSCT5V021D2: 17 SSCT12V21D2: 11 SSCT15V21D2: 10 SSCT24V21D2: 7 SSCT36V21D2: 5	A
ESD Rating per IEC61000-4-2: Contact Air	V_{ESD}	30 30	kV
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$

- Electrical Characteristics @ $T_A=25^{\circ}\text{C}$

SSCT3V321D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	V_{RWM}			3.3	V	
Breakdown Voltage	V_{BR}	4.0			V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_R			40	μA	$V_{RWM} = 3.3\text{V}$
Clamping Voltage	V_C		6.5		V	$I_{PP} = 1\text{A}$ (8 x 20 μs pulse)
Clamping Voltage	V_C			10.5	V	$I_{PP} = 20\text{A}$ (8 x 20 μs pulse)
Junction Capacitance	C_J		450		pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$




SSCTXXX21D2


SSCT5V021D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	VRWM			5	V	
Breakdown Voltage	VBR	6.2			V	IT = 1mA
Reverse Leakage Current	IR			10	μA	VRWM = 5V
Clamping Voltage	VC		9.8		V	IPP = 1A (8 x 20μs pulse)
Clamping Voltage	VC			18.6	V	IPP = 17A (8 x 20μs pulse)
Junction Capacitance	CJ		300		pF	VR = 0V, f = 1MHz
SSCT12V21D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	VRWM			12	V	
Breakdown Voltage	VBR	13.3			V	IT = 1mA
Reverse Leakage Current	IR			1	μA	VRWM = 12V
Clamping Voltage	VC		19		V	IPP = 1A (8 x 20μs pulse)
Clamping Voltage	VC			32	V	IPP = 11A (8 x 20μs pulse)
Junction Capacitance	CJ		130		pF	VR = 0V, f = 1MHz
SSCT15V21D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	VRWM			15	V	
Breakdown Voltage	VBR	16.7			V	IT = 1mA
Reverse Leakage Current	IR			1	μA	VRWM = 15V
Clamping Voltage	VC		17.6		V	IPP = 1A (8 x 20μs pulse)
Clamping Voltage	VC			38	V	IPP = 10A (8 x 20μs pulse)
Junction Capacitance	CJ		120		pF	VR = 0V, f = 1MHz
SSCT24V21D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	V _{RWM}			24	V	
Breakdown Voltage	V _{BR}	26.7			V	I _T = 1mA
Reverse Leakage Current	I _R			1	μA	V _{RWM} = 24V
Clamping Voltage	V _C		43		V	IPP = 1A (8 x 20μs pulse)
Clamping Voltage	V _C			52	V	IPP = 7A (8 x 20μs pulse)
Junction Capacitance	C _J		80		pF	V _R = 0V, f = 1MHz
SSCT36V21D2						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage	V _{RWM}			36	V	
Breakdown Voltage	V _{BR}	40			V	I _T = 1mA
Reverse Leakage Current	I _R			1	μA	V _{RWM} = 36V
Clamping Voltage	V _C		60		V	IPP = 1A (8 x 20μs pulse)
Clamping Voltage	V _C			70	V	IPP = 5A (8 x 20μs pulse)
Junction Capacitance	C _J		60		pF	V _R = 0V, f = 1MHz




- Typical Performance Characteristics

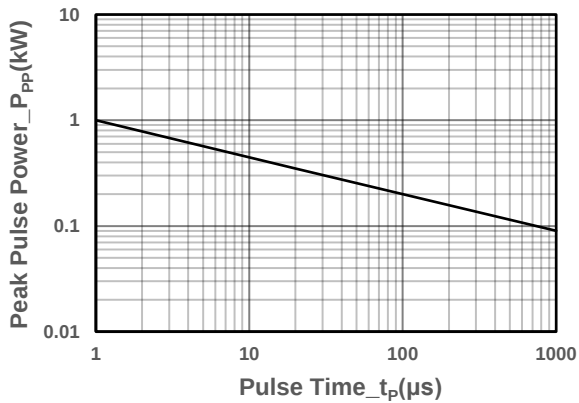

Peak Pulse Power vs. Pulse Time

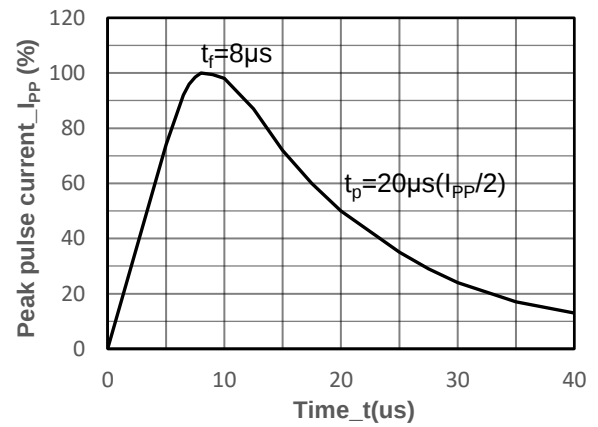

8/20 μ s Pulse Waveform

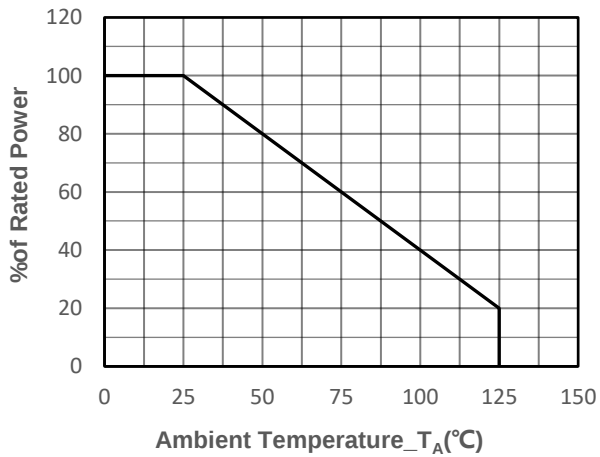

Power derating vs. Ambient temperature



● Package Information



Ordering Information

Device	Package	Marking	Qty per Reel	Reel Size
SSCT3V321D2	SOD-323	03	3000	7 Inch
SSCT5V021D2	SOD-323	05	3000	7 Inch
SSCT12V21D2	SOD-323	D12	3000	7 Inch
SSCT15V21D2	SOD-323	D15	3000	7 Inch
SSCT24V21D2	SOD-323	D24	3000	7 Inch
SSCT36V21D2	SOD-323	36	3000	7 Inch

Mechanical Data


Case: SOD-323

Case Material: Molded Plastic. UL Flammability

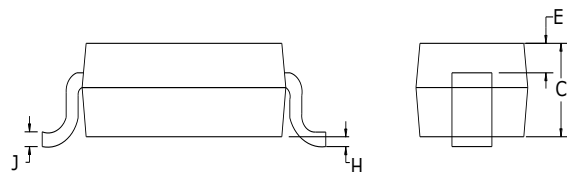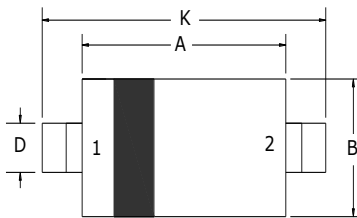

Dim	Millimeters	
	Min	Max
A	1.60	1.80
B	1.2	1.40
C	0.80	0.90
D	0.25	0.35
E	0.15REF	
H	0	0.10
J	0.08	0.15
K	2.50	2.70

Recommended Pad outline (Unit: mm)

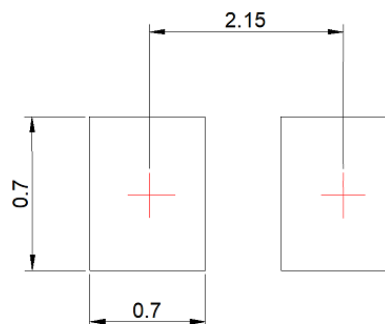



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.