



SSCE5V0B1N1

1-Line Uni-directional low Capacitance TVS Diode

● Description

The SSCE5V0B1N1 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The SSCE5V0B1N1 has a low capacitance with a typical value at 1pF, and complies with the IEC 61000-4-2 (ESD) with $\pm 15\text{kV}$ air and $\pm 10\text{kV}$ contact discharge. It is assembled into an ultra-small 1.0x0.6x0.5mm lead-free DFN package.

Also because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed, USB 3.0 super speed, VGA, DVI, HDMI, SDI and other high speed line applications.

● Features

- ✧ 120W peak pulse power ($t_P = 8/20\mu\text{s}$)
- ✧ DFN1006-2L Package
- ✧ Working voltage: 5V
- ✧ Low Leakage Current
- ✧ Low capacitance
- ✧ Low clamping voltage
- ✧ Response Time is Typically $< 1\text{ns}$
- ✧ Complies with following standards:
 - IEC61000-4-2(ESD) $\pm 10\text{kV}$ (contact), $\pm 15\text{kV}$ (air)
 - IEC61000-4-5(Lightning) 8A(8/20 μs)

● Mechanical Characteristics

- ✧ Package: DFN1006-2L (1.0x0.6x0.5mm)
- ✧ Case Material: "Green" Molding Compound.
- ✧ UL Flammability Classification Rating 94V-0
- ✧ Moisture Sensitivity: Level 3 per J-STD-020

● PIN configuration



DFN1006-2L (Bottom View)



Circuit Diagram



Marking (Top View)


● Applications

- ✧ DVI & HDMI Port Protection
- ✧ USB 2.0 and USB 3.0
- ✧ SATA and eSATA
- ✧ Serial and Parallel Ports
- ✧ Projection TV
- ✧ Notebooks, Desktops, Servers
- ✧ Digital cameras



● Electronic Parameter

Symbol	Parameter
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
P_{PP}	Peak Pulse Power
C_J	Junction Capacitance

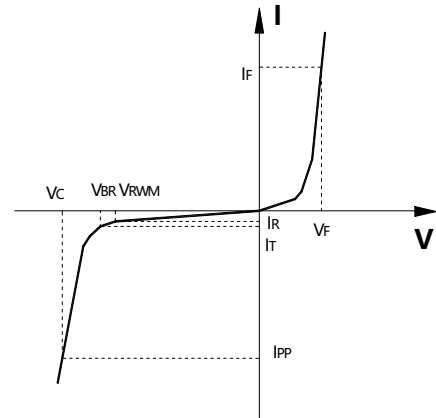

● Absolute maximum rating ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units
Peak Pulse Power (8/20 μs)	P_{PP}	120	W
Peak Pulse Current (8/20 μs)	I_{PP}	8	A
ESD Rating per IEC61000-4-2: Contact Air	V_{ESD}	± 10 ± 15	kV
Storage Temperature	T_{STG}	-55/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-55/+125	$^{\circ}\text{C}$


● Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	5.8			V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$			1	μA
Forward Voltage	V_F	$I_F = 10\text{mA}$			1	V
Clamping Voltage	V_C	$I_{PP} = 8\text{A}$, $t_P = 8/20\mu\text{s}$		12	16	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$		1	1.6	pF




SSCE5V0B1N1


- Typical Performance Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

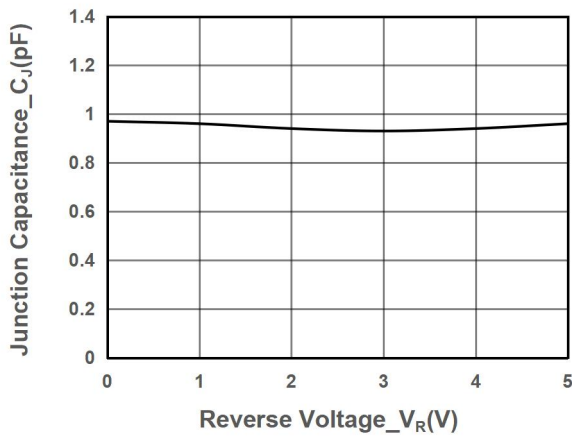


Junction Capacitance vs. Reverse Voltage

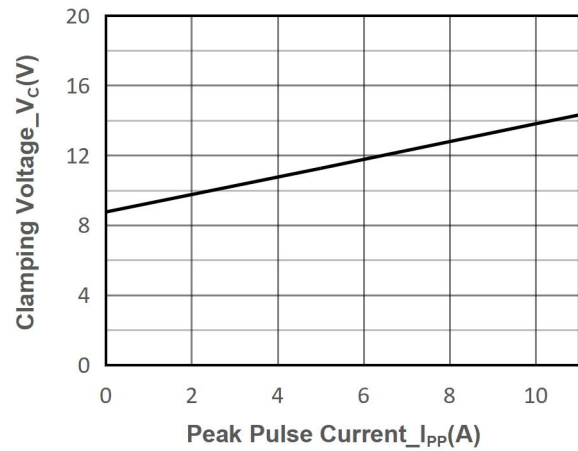

Clamping Voltage vs. Peak Pulse Current

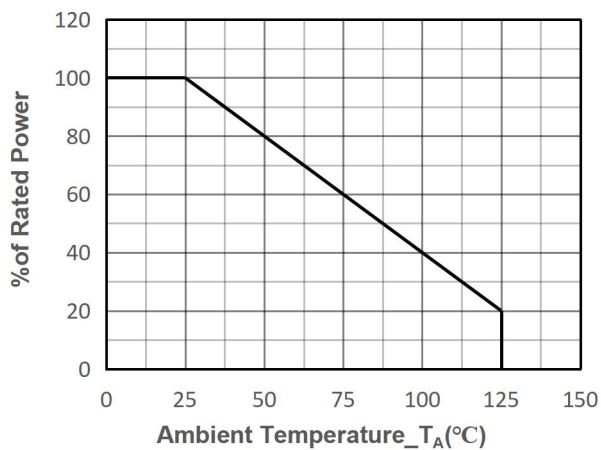

Power derating vs. Ambient temperature

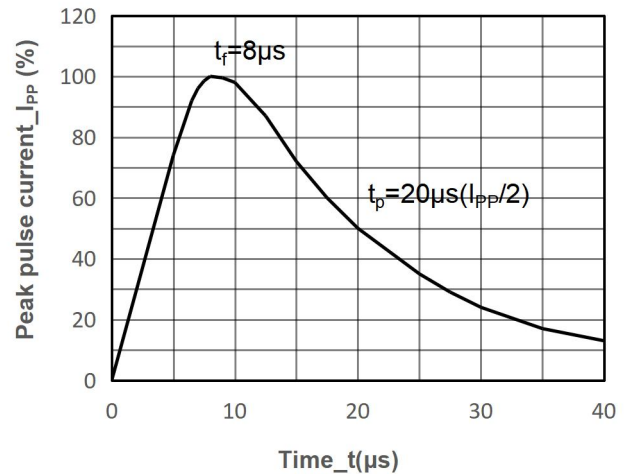

8/20 μs Pulse Waveform



SSCE5V0B1N1

● Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCE5V0B1N1	DFN1006-2L	10000	7 Inch

Mechanical Data


Case: DFN1006-2L

Case Material: Molded Plastic. UL Flammability

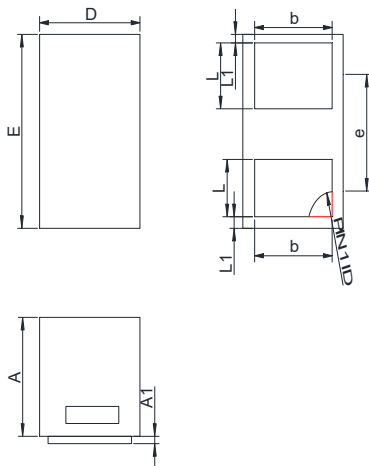


DIM	Millimeters	
	Min	Max
A	0.43	0.55
A1	0.00	0.05
D	0.55	0.65
E	0.95	1.05
b	0.45	0.60
e	0.65TYP	
L	0.2	0.3
L1	0.05REF	


Recommended Pad outline (Unit: mm)

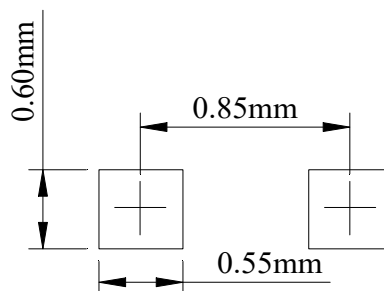

● Type and Reel Information-DFN1006-2L

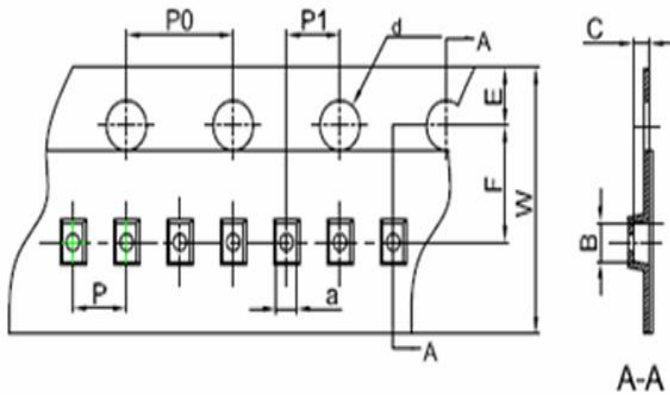


DIM	Millimeters
	Typ
a	0.68
B	1.14
C	0.58
d	Φ 1.55
E	1.75
F	3.50
P0	4.00
P	2.00
P1	2.00
W	8.00

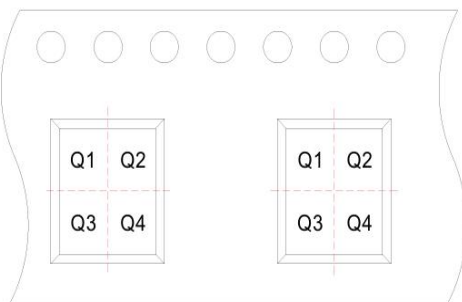

User direction of feed



Pin 1 Quadrant: Q1&Q2

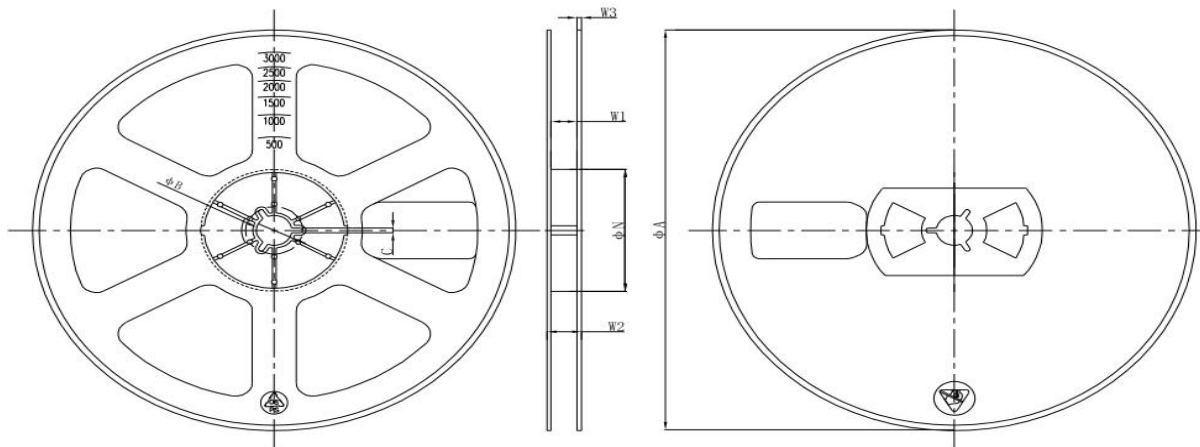

ΦA	ΦN	ΦB	C	W1	W2	W3
178mm	54mm	13.2mm	2.2mm	9.5mm	13 _{max} mm	1.4mm



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.